



# Leon County

## Board of County Commissioners

301 South Monroe Street, Tallahassee, Florida 32301  
(850) 606-5302 www.leoncountyfl.gov

Purchasing Division  
1800-3 Blair Stone Road  
(corner of Miccosukee and Blair Stone Roads)  
Tallahassee, Florida 32308  
(850) 606-1600

### Commissioners

BILL PROCTOR

District 1

JANE G. SAULS

District 2

JOHN DAILEY

District 3

BRYAN DESLOGE

District 4

KRISTIN DOZIER

District 5

MARY ANN LINDLEY

At-Large

NICK MADDOX

At-Large

VINCENT S. LONG

County Administrator

HERBERT W.A. THIELE

County Attorney

March 6, 2013

RE: Bid Title: Killlearn Lakes Drainage Project, Phase 1b  
Bid No: BC-03-14-13-27  
Opening Date: Thursday, March 14, 2013 at 2:00 PM

### ADDENDUM #1

Dear Vendor:

This letter serves as Addendum #1 for the above referenced project. The following is supplied for clarifications to the bid specifications:

- Q Is tree protection required in addition to areas where silt fence is constructed?
- A. Yes, unless LCDSEM Inspector allows exception
- Q. In certain constricted areas can orange visual screening be used in lieu of lumber for tree protection?
- A. No, unless LCDSEM allows
- Q. Will new concrete flumes use the same typical section as the ditch? There is no flume detail.
- A. No. For proposed flumes shown on sheets 212, 216, 220, 222, 223, & 224, the a.flume is similar to using two modified "F" curbs face to face. See attached detail. Lengths vary and are shown on the plans. For the flume shown on sheet 308, match existing flume (extend flume to new ditch bottom).
- Q Please clarify the location of sod. Sheet L1.0 Typical upland plan calls for seeded erosion mat and other pages refer to sod.
- A. All disturbed areas shall be sodded (note #11 of general notes) except in shaded areas. (per details on sheet 400) In shaded areas, a mat shall be installed with appropriate seed mix. (see details on sheet 400) Approximate quantities of sod and seeds we're shown on the bid form.
- Q. What is the width of sod outside the sandbag ditch pave areas? DOT index 281 shows 2 feet on each side.
- A. All disturbed areas shall be sodded (from edge of sandbags to limits of construction) see response to 4 above.

March 6, 2013

Page 2

- Q. Will all other disturbed areas be sodded, seed and much or erosion mating on areas greater than 2% slope?
- A. *All disturbed areas shall be sodded per details on sheet 400. Any areas with greater than 2% slope shall have sand cement ditch paving.*
- Q. Same question for swale areas less than 2% slope. Sod just the ditch section or all disturbed areas?
- A. *All disturbed areas shall be sodded per details on sheet 400.*
- Q. Is this a unit cost bid?
- A. Yes
- Q. What is the warranty time period for landscape and sod without irrigation on this project?
- A. *One Year (see note #2 on sheet L2.0)*


The Project has a 360 Day performance period.

Attachment A is the detail for the Flume.

Acknowledgment of this addendum is required as part of your bid submittal. Failure to acknowledge this addendum may result in rejection of your bid.


Should you have any questions, feel free to call me at (850) 606-1600.

Sincerely,

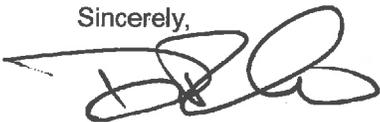

Don Tobin, CPPB  
Purchasing and Contracting Administrator

DT

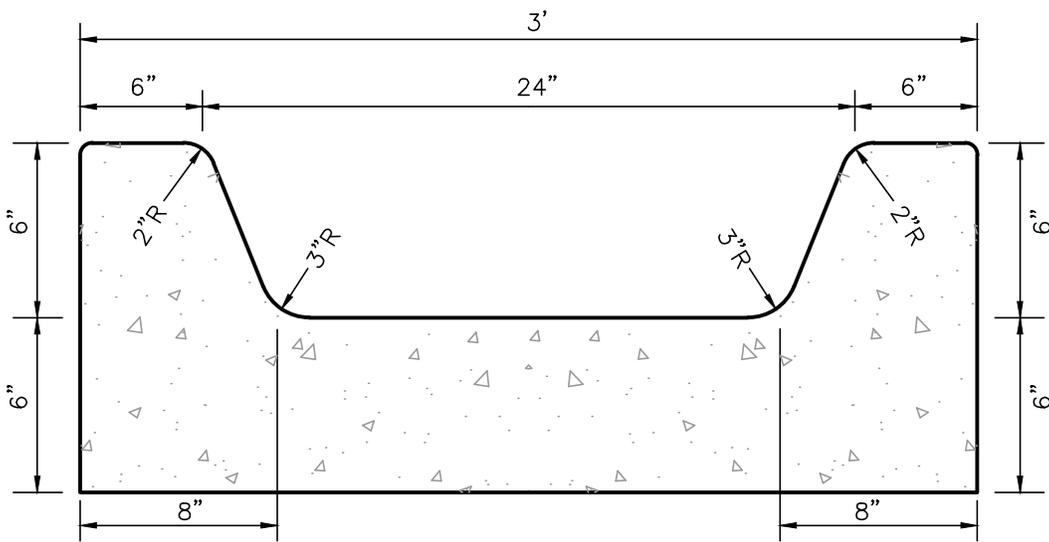

CONC. FLUME

NTS